

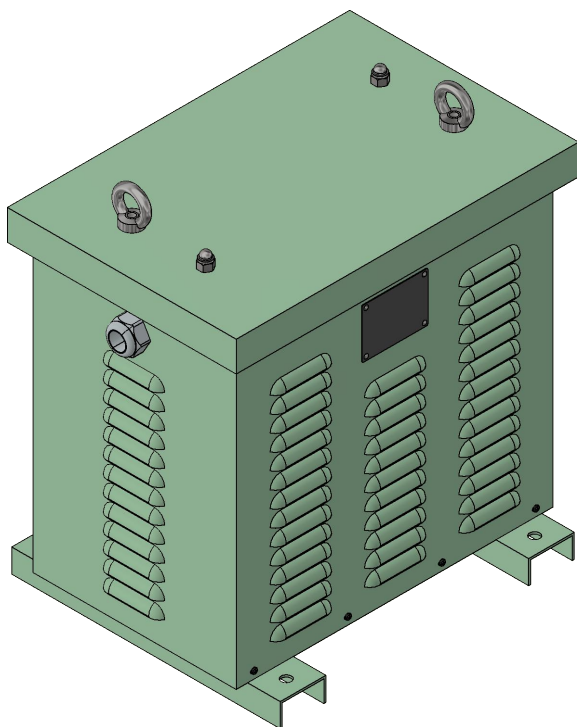
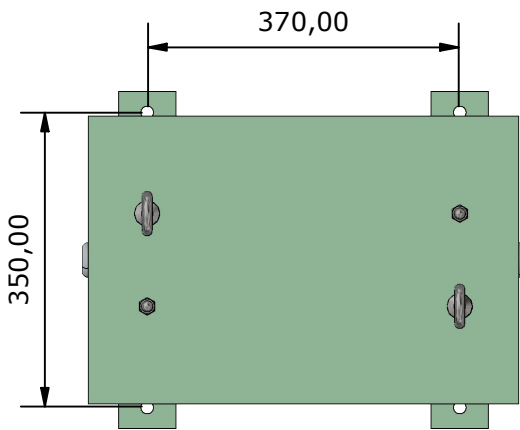


2

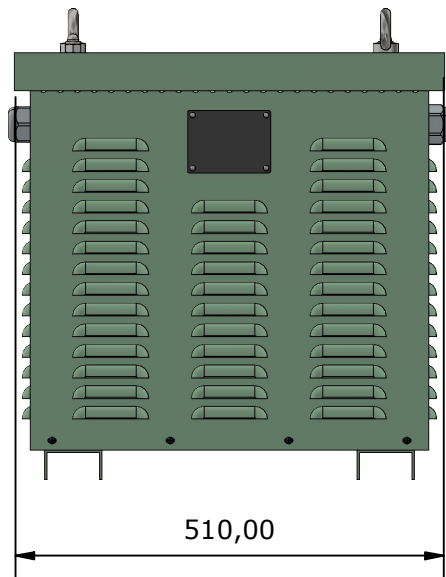

1

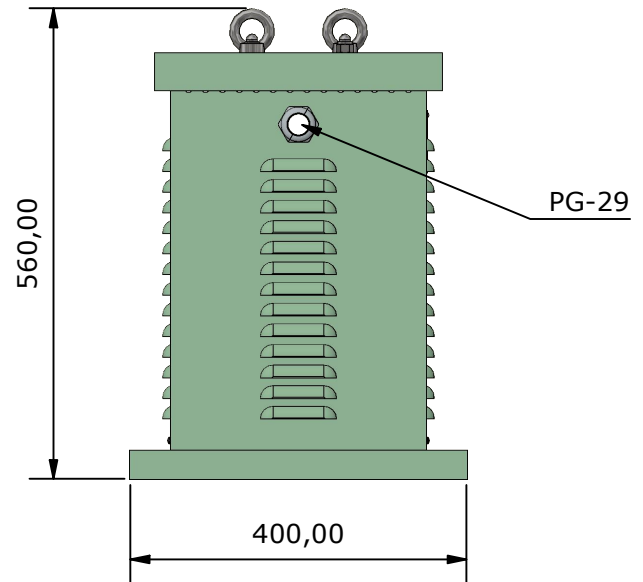

### TECHNICAL DATA

According Standard	EN-61.558-2-13
Rated Power	30 KVA
Primary Voltage	220/380/440/480V + N
Secondary Voltage	220/380/440/480V + N
Frequency	50/60 Hz
Protection Grade	IP-23
Isolement Level	F
ED:	100%
ta	40°C
Class	I
Strength Dielectric test between live parts	-
Strength Dielectric test between live parts and mass	2.750V
Data Plate	Yes
Electrostatic screen	Non
Wound wires	Aluminum wire G-2 class H
Magnetic Core	Non oriented grain, cold lamination. M 330-50A EN10106
Bobbin	PA6 + Glass Fiber (30%)
Type Refrigeration	Dry
Connection	YN
Terminal block	Screw M12
Weight	85 Kg.

Drew by:

Miguel A. Hdez. - 15/03/2023

Approved by:

Victor Gallego - 15/03/2023

THREE-PHASE AUTOTRANSFORMER

Units:  
mm.

XRB04330533

Page 1 de 1  
Rev: 01  
Rev date.: 15/03/2023

MANUMAG SL - C/Antonio Barriendos s/n, Pol. Ind. Las Norias  
50450-MUEL, SPAIN - VAT ESB50040146  
Tel +34 976 140606 - Fax +34 976 140 607  
comercial@manumag.com, export@manumag.com

2

1