

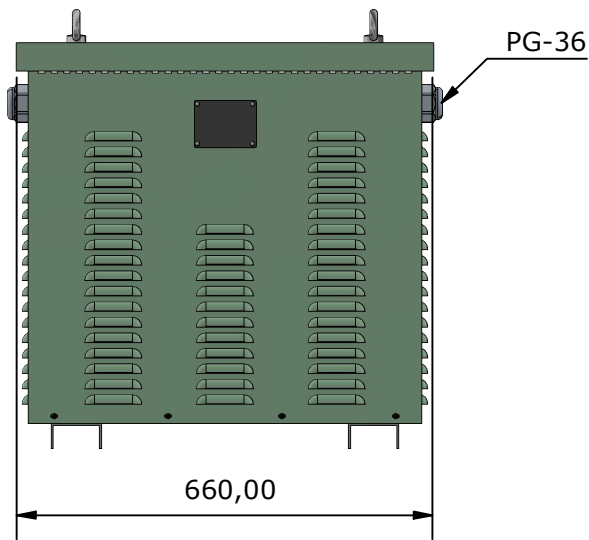
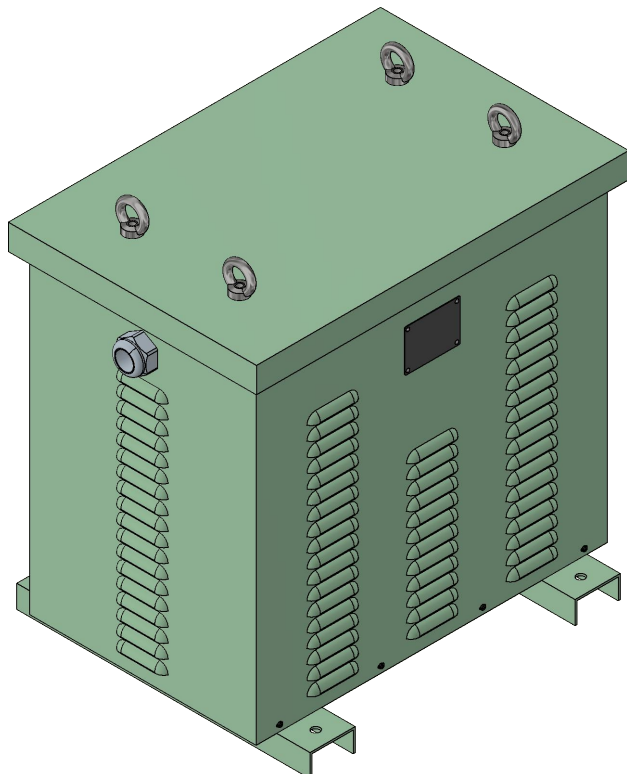


2

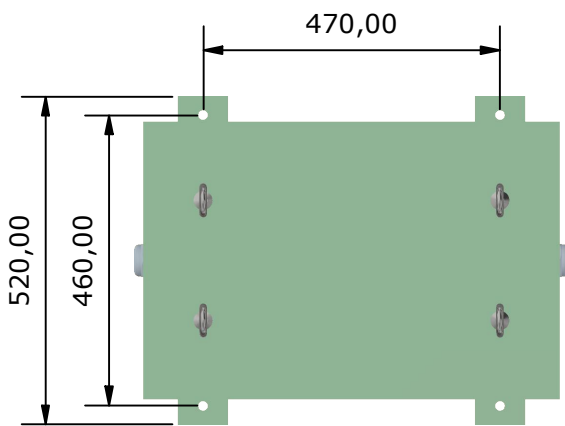

1

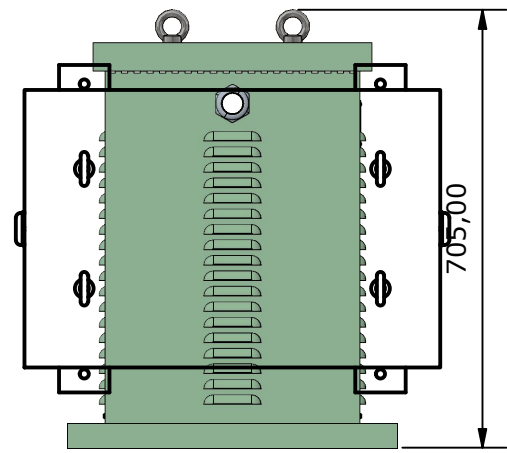

### TECHNICAL DATA

According Standard	EN-61.558-2-4
Rated Power	60 KVA
Primary Voltage	400V
Secondary Voltage	690V + N
Frequency	50/60 Hz
Protection Grade	IP-23
Isolement Level	F
ED:	100%
ta	40°C
Class	I
Strength Dielectric test between live parts	4.600V
Strength Dielectric test between live parts and mass	3.500V
Data Plate	Yes
Electrostatic screen	Non
Wound wires	Enamelled cooper wire class H
Magnetic Core	Non oriented grain, cold lamination. M 330-50A EN10106
Bobbin	PA6 + Glass Fiber (30%)
Type Refrigeration	Dry
Connection	Dyn
Terminal block	CONTA CLIP 50mm - PRI CONTA CLIP 95mm - SEC
Weight	231 Kg.

Drew by:

Miguel A. Hdez. - 07/11/2023

Approved by:

Victor Gallego - 07/11/2023

THREE-PHASE ISOLATION TRANSFORMER

Units:  
mm.

YAQ03607363

Page 1 de 1  
Rev: 01  
Rev date.: 07/11/2023

MANUMAG SL - C/Antonio Barriendos s/n, Pol. Ind. Las Norias  
50450-MUEL, SPAIN - VAT ESB50040146  
Tel +34 976 140606 - Fax +34 976 140 607  
comercial@manumag.com, export@manumag.com

2

1