

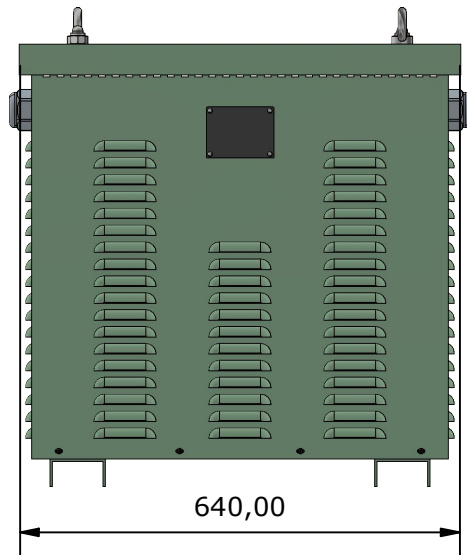
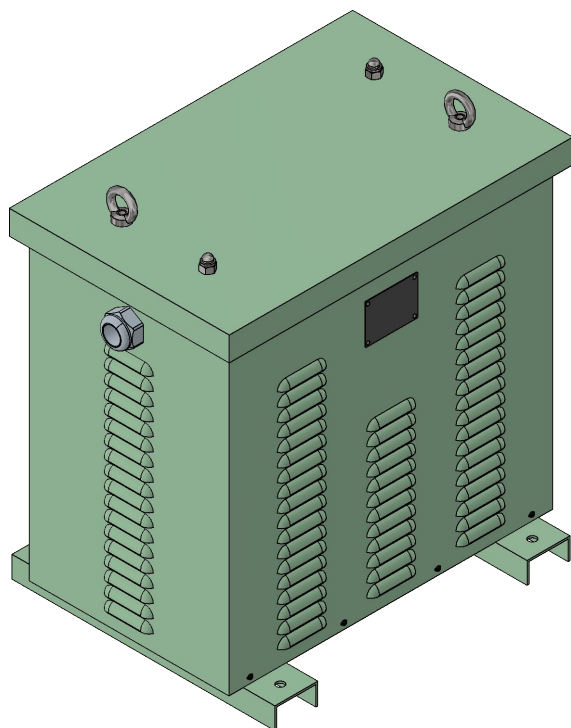


2

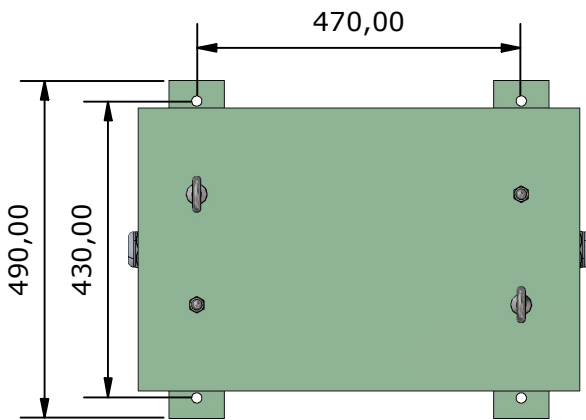

1

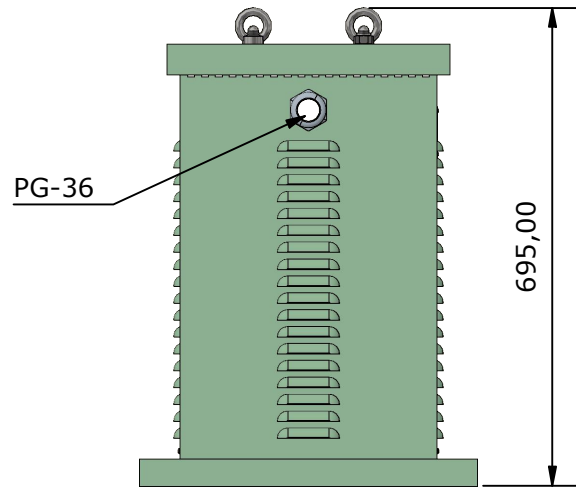

TECHNICAL DATA

According Standard	EN-61.558-2-4
Rated Power	30 KVA
Primary Voltage	400V (III)
Secondary Voltage	230V (I)
Frequency	50/60 Hz
Protection Grade	IP-23
Isolement Level	F
ED:	100%
ta	40°C
Class	I
Strength Dielectric test between live parts	4.600V
Strength Dielectric test between live parts and mass	3.500V
Data Plate	Yes
Electrostatic screen	Non
Wound wires	Cooper wire G-2 class H
Magnetic Core	Non oriented grain, cold lamination. M 330-50A EN10106
Bobbin	PA6 + Glass Fiber (30%)
Type Refrigeration	Dry
Connection	V-v inv.
Terminal block	CONTA CLIP 35mm (III) CONTA CLIP 50mm (I)
Weight	178 Kg.

Drew by:

Miguel A. Hdez. - 11/05/2023

Approved by:

Victor Gallego - 11/05/2023

THREE PHASE-SINGLE PHASE ISOLATION
TRANSFORMERUnits:
mm.

YZV03305403

Page 1 de 1
Rev: 01
Rev date.: 11/05/2023MANUMAG SL - C/Antonio Barriendos s/n, Pol. Ind. Las Norias
50450-MUEL, SPAIN - VAT ESB50040146
Tel +34 976 140606 - Fax +34 976 140 607
comercial@manumag.com, export@manumag.com

2

1